

SPECIFICATIONS AND FEATURES:

1. Max load capacity: 20 tons @ 600 mm GC (Gravity Center)
2. Max eccentricity: 200 mm
3. Table rotation speed: Variable from 0.05 up to 0.5 RPM
4. Tilt rotation speed: Variable from 0.01 to 0.1 RPM
5. Tilt angle: From -30° to 90°
6. Rotation motor power: 5.5 kW @ 2
7. Tilting motor power: 4.0 kW @ 2
8. Rotation torque: 47,000 Newton-m
9. Tilt torque: 136,000 Newton-m
10. Table diameter: 2.0 m with extended arms to load up to 3.00 m Ø work piece
11. Table with eight M20 "T" slots equally spaced @ 45° apart
12. Extended legs for un-tip over floor
13. Remote control box with 12 m cable. Box controls rotation forward/stop/reverse. Speed potentiometer and digital display in mm/min
14. Protection class IP55 against dust and heavy rain on electric control box & motors
15. Electric Input Power (V, Hz, 3 P): As per customer request
16. Operation Manual, Electric Diagram and One Year Warranty

POSITIONER CAPACITY:

Metric Tons @ Gravity Center
from Surface Table (mm)

1. 20 tons @ 600 mm GC
2. 17 tons @ 700 mm GC
3. 15 tons @ 800 mm GC
4. 13 tons @ 900 mm GC
5. 12 tons @ 1,000 mm GC
6. 10 tons @ 1,200 mm GC
7. 6.8 tons @ 1,400 mm GC
8. 6 tons @ 1,600 mm GC
9. 5 tons @ 1,800 mm GC

Maximum Eccentricity: 200 mm

POSITIONER MODEL WP 20

IRIZAR

IRIZAR HEAVY INDUSTRIES INC
1512 ADAMSON VIEW, EDMONTON
ALBERTA T6W 0V4, CANADA
PHONE: 1 780 450 6695
WEB: WWW.IRIZAR.COM

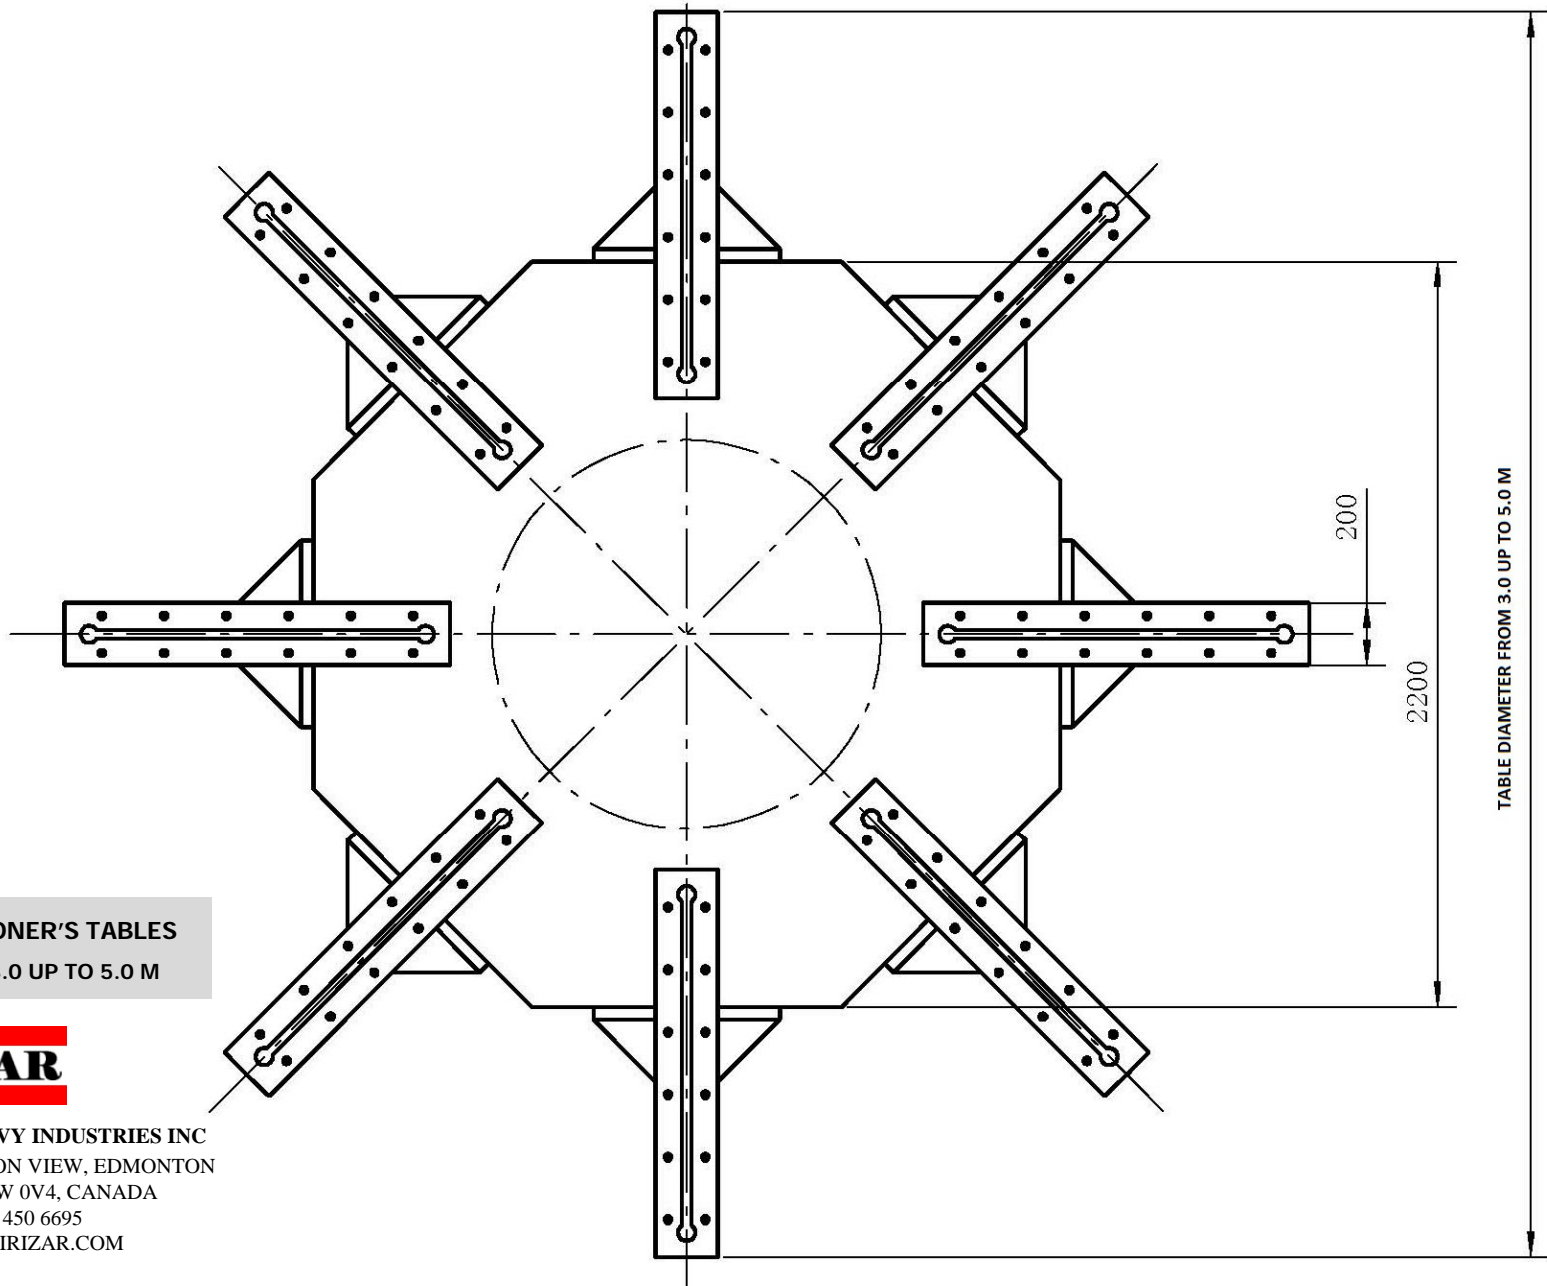


TABLE DIAMETER FROM 3.0 UP TO 5.0 M

200

2200

POSITIONER'S TABLES
FROM 3.0 UP TO 5.0 M



IRIZAR HEAVY INDUSTRIES INC
1512 ADAMSON VIEW, EDMONTON
ALBERTA T6W 0V4, CANADA
PHONE: 1 780 450 6695
WEB: WWW.IRIZAR.COM



POSITIONER MODEL
WP 20 @ 600 mm GC

IRIZAR

IRIZAR HEAVY INDUSTRIES INC
1512 ADAMSON VIEW, EDMONTON
ALBERTA T6W 0V4, CANADA
PHONE: 1 780 450 6695
WEB: WWW.JIRIZAR.COM